



PATENT

IFW

THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application of) Customer No.: 37003
MYLES et al.)
Application No.: 10/782,224) Group: 2681
Filing Date: February 19, 2004) Examiner: N/A
Title: AUTHENTICATION METHOD FOR ENABLING) Docket N°: 57.0546 US NP
A USER OF A MOBILE STATION TO ACCESS TO)
PRIVATE DATA OR SERVICES)

I hereby certify that this correspondence is being deposited with the United States Postal Service on the date shown below with sufficient postage as first class mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 on June 16, 2004.

Ruth A. Schreiber 6-16-04
Ruth A. Schreiber Date

SUBMISSION OF PRIORITY DOCUMENT

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

Attached hereto is a certified copy of Great Britain Patent Application No. 0304060.7, filed 21 February 2003, for the above-captioned application. Priority is claimed under 35 U.S.C. §119 and 37 CFR §1.55.

Respectfully submitted,

By: William B. Batzer
William B. Batzer
Registration N° 37,088

Intellectual Property Law Department
Schlumberger-Doll Research
36 Old Quarry Road
Ridgefield, Connecticut 06877-4108
(203) 431-5506
Date: June 16, 2004





INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein together with the Statement of inventorship and of right to grant of a Patent (Form 7/77), which was also filed.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 2 March 2004



Statement of inventorship
right to grant of a patent

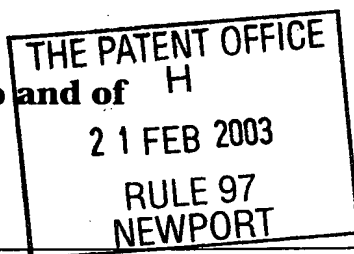

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

57.0546 GB NP

2. Patent application number
(if you know it)

0304060.7

21 FEB 2003

3. Full name of the or of each applicant

Schlumberger Holdings Limited

4. Title of the invention

Authentication method for enabling a user of a mobile
station to access to private data or services

5. State how the applicant(s) derived the right
from the inventor(s) to be granted a patent

The applicant and the inventors' employer are affiliated Schlumberger
companies. The applicant derived the right to be granted a patent by
virtue of agreement with the employer of the inventors.

6. How many, if any, additional Patents Forms
7/77 are attached to this form?
(see note (c))

7. I/We believe that the person(s) named over the page (and on
any extra copies of this form) is/are the inventor(s) of the invention
which the above patent application relates to.

Signature

Date

20 February 2003

8. Name and daytime telephone number of
person to contact in the United Kingdom

Christophe Macquet
01223 325268

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

MYLES, Colin
10 Pepperslade
Duxford
Cambridgeshire CB2 4XT
United Kingdom

Patents ADP number (if you know it): 8571689001

OWEN, Richard
4 The Crescent
Impington
Cambridgeshire CB4 9NY
United Kingdom

Patents ADP number (if you know it): 8571697001


Reminder

Have you signed the form?

Patents ADP number (if you know it):

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

57.0546 GB NP

21 FEB 2003

2. Patent application number

(The Patent Office will fill in this part)

0304060.7

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Schlumberger Holdings Limited

PO Box 71
Craigmuir Chambers
Road Town

Patents ADP number (if you know it)

Tortola
British Virgin Islands

If the applicant is a corporate body, give the country/state of its incorporation

British Virgin Islands

7236326 001

4. Title of the invention

Authentication method for enabling a user of a mobile station to access to private data or services

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Christophe MACQUET
Intellectual Property Law Department
Schlumberger Cambridge Research Limited
High Cross
Maddingley Road
Cambridge CB3 0EL
United Kingdom

Patents ADP number (if you know it)

8086829001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -

Description 8 ✓

Claim(s) 2 ✓

Abstract 1 ✓

Drawing(s) 2 *12 Jml*

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 1 ✓


Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77) 1 ✓

Any other documents -
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date

20 February 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Christophe Macquet
01223 325268

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Authentication method for enabling a user of a mobile station to access to private data or services

Field of the invention

5

The invention relates to a method for authenticating a user of a mobile station for accessing to private data or services, and more particularly to a text-message based authentication method.

10 **Background of the invention**

A user of a mobile station, such as a mobile phone, a feature phone, or an evolved laptop computer or a personal digital assistant (pda) having communication capabilities (compliant with GSM, CDMA, 2.5G, 3G, UMTS...etc networks), or a smart-device (i.e. a
15 combination of pda and mobile phone) enables its user to have access to remote source of data or services.

As an example described in WO 02/076122, it is possible for a user of a mobile station to have access to a telephone directory service. Typically, the user place a call to a specific number and request a phone number. The requested phone number is received
20 via a short message services (SMS) and can be further stored in the mobile station for later use. In such a system, the user selects the requested information by either accessing a web interface or indirectly through an operator.

This access to the information is quite complicated and do not offer sufficient security, in particular when an access to private data or services is required.

25

Object and summary of the invention

Therefore it is an object of the present invention to provide a method and system that overcomes the at least one shortcoming of the prior art system.

30 The present invention is based on a text-message based authentication method of a user/mobile station combination which enables the user of the mobile station to access to private data or services.

According to the invention, the method comprises the steps of :

- composing a request message on the mobile station, said message including a
35 request for private data/services, and sending said request message to a private server

o...ing the access to said private data/services of a private database/service node, via the telephone network,

- checking the authenticity of the user based on the request message received by the server,

- 5 - if the user authenticity is confirmed, composing a response message including the requested private data/service of the private server, and sending back to the user said response message, via the telephone network,

wherein the request message additionally includes a user unique identifier, and is received by the private server with an appended user mobile station number, and

- 10 wherein the authenticity checking performed by the private server comprises the steps of :

- checking whether the user unique identifier is stored in the private directory database,
- checking whether the appended user mobile station number matches with the user mobile station number allocated to the user unique identifier stored in the private
- 15 directory database.

From the mobile station user perspective, the security is improved because the user knows to which private server number he has to send the request message, and he knows his own user unique identifier to be included in the request message. Security

20 can be additionally enhanced if these data are not stored in the mobile station.

From the private data or service provider, the security is improved because authorized mobile station user are listed in the private directory database of the corporation or organization, and two particular fields (i.e. the user mobile station number and the user

25 unique identifier) are checked for authentication. Additionally, the response message is sent back to the originating mobile station number requesting the data/service. Security can be further enhanced if the request and response message are encrypted, particularly when routed on the telecommunication network.

30 It is understood that such private data or services can be, as an example, corporate data or corporate services offered by a company to selected employees. Corporate data can be data of a corporate directory such as lightweight directory access protocol (ldap) database (also called ldap directory). Such a database offers professional and/or personal data about employees of a corporation, or known or authorized persons of an

35 organization. Such data can be name, employee number, employee unique identifier,

a, e-mail address, phone number, location, office number, personal picture, function, ...etc. Corporate service can be for example technical data service, like providing an access to real-time data related to the corporate operations, e.g. providing measurement given by a remote sensor.

5

The message based authentication method of the invention provides a reasonable first-level identification and authorization of a mobile station user for accessing to private data or services which do not need a strong or high-level of security.

Also, the method is simple and easy to use for any kind of mobile station that supports
 10 SMS (short message services), EMS (enhanced message services) or MMS (multimedia message services) type message. Today SMS message and in a close future EMS and MMS message are/will be available for users outside their home networks when roaming on visited networks. Thus, the authentication mechanism based on standard text message can use the worldwide available mobile phone infrastructures
 15 and services.

Another advantage is that the method of the invention works independently of the mobile station identification and authentication of the network operators. Therefore, this method can be implemented smoothly without interfering in the phone network operation.

20 Other characteristics and advantages of the invention will be described in more detailed in the following description of the invention and in one practical example of application.

Brief description of the drawings

The following detailed description, given by way of example, will be best understood
 25 with the accompanying drawings in which :

- Figure 1 represents schematically a system for implementing the authentication method of the invention ;
- Figure 2 shows a flowchart representing the different steps of the authentication method of the invention ;
- 30 - Figure 3 illustrates the layout of a request message of the SMS type.

Detailed description of the invention

Figure 1 illustrates schematically the different elements of a system and their interaction for implementing the authentication method of the invention. This figure will be

described in combination with figure 2 which represents the different steps of said authentication method.

In a first step 1, the user of mobile station MS compose a request message on his mobile station. This request message can be formatted as a SMS, EMS or MMS type message and is written with a specific layout.

The request message comprises an authentication part and a data or service request part. Advantageously, the authentication part comprises a unique identifier of the mobile station user. The specific layout will be presented in more details with the description related to Figure 3 below.

The request message is sent to a specific telephone number corresponding to the messaging gateway MG. The request message is routed across the telephone network N to the messaging gateway MG. The telephone network architecture, functionality and way of routing calls or message are well know by the man skilled in the art and therefore will not be further detailed. It is well known that the telephone network N can comprise, while not being limited to, a first mobile phone network GSM1 of a first mobile telecommunication operator covering a first area, a second mobile phone network GSM2 of a second mobile telecommunication operator covering a second area, and a public switched telecommunication network PSTN of fixed telecommunication operator. Said network N comprises at least one messaging center MC dedicated to manage and route SMS, or EMS, or MMS type message. Obviously, the structure, number of sub-networks and inter-connection can be more complex than what is shown on Figure 1. Each of these local networks are inter-connected to each other to provide local, regional, national and international communication to any user of mobile station having subscribe to roaming capability outside its telecommunication operator home network.

The messaging gateway MG will receive the request message. The messaging gateway is an interface between the network N and a private infrastructure PI. The private infrastructure PI comprises all the resources (internal network, server, computer, databases...etc) of e.g. a corporation or an organization. The private infrastructure PI shown in figure 1 comprises a processing server PS, a corporate directory database DB, a database or an equipment (e.g. a sensor) providing data D and a service node S. All other elements of this private infrastructure are omitted for sake of drawing clarity.

In a second step 2, the received request message is routed by the messaging gateway to the processing server PS. The server separates the authentication part, the data or service request part, and the originating mobile station phone number from the request message. It is to be noted that originating mobile station phone number is tagged to the

incoming message as indicated in ETSI standard TS 100 901 related to Technical realization of the Short Message Service (SMS) (GSM 03.40 version 7.4.0 Release 1998). Then the server check whether the user unique identifier of the authentication part is present on the private directory database DB.

- 5 Here, the processing server PS has two functions, one is to process the message and the other is to authenticate the message. As an alternative (not shown on Figures), it is possible to have a message processing server and a distinct authentication server. In this case, the message processing server role is only to separate the authentication part, the data or service request part, and the originating mobile station phone number
10 from the request message, while the authentication server only performs a look-up request on the private directory database DB.

If the user unique identifier is not present in the private directory database DB, then an error sequence is generated by the processing server PS (step 3) and access to private data or services is denied. In this case, either a error response message is sent back to
15 the mobile station, or alternatively not any response message is sent back to the mobile station in order to avoid possible unauthorized access through probing.

In case, the user unique identifier of the authentication part is present on the private directory database DB, the user mobile station number assigned to the user unique identifier and stored in the private directory database DB is retrieved from the database
20 DB by the processing server PS (step 4) or alternatively by the authentication server. This mobile station user number is recognized as being known and authorized to communicate with the corporation or the organization.

After this successful private directory look-up, a second checking is performed (step 5). This second check consists in comparing the user mobile station number attached to
25 the request message with the user mobile station number assigned to the user unique identifier and stored in the private directory database DB.

It is to be noted that the user mobile station number is the cell-phone, mobile phone, feature phone or a smart-device number that is allocated and stored on the originating mobile station and allocated to this particular user in the ldap directory. As an example,
30 this number is the assigned phone number of the SIM-card (SIM stands for Subscriber Identity Module) present in the mobile station for authorizing access to the telecommunication network.

If there is no match between the two mobile station number than an error sequence is generated by the processing server PS (step 6) and access to private data or services

is rejected. In this case, either a error response message is sent back to the mobile station, or alternatively not any response message is sent back to the mobile station.

If there is a perfect match between the two mobile station number than the processing server PS performs the request for data or services asked by the user in the request message (step 7).

After the processing server obtains the requested information from either the private directory database DB, or the database/equipment D or the services node S, a response message is composed which includes the requested private data and send back to the user mobile station number (step 8) via the network N.

10 Depending of the request, either a SMS type message containing only text, or a EMS type message or a MMS type message containing image, video or graphics is sent back to the user.

The authentication method can be used for authenticated access to a range of private, or corporate data or services independently of the mobile station type and
15 independently of the wireless telecommunication services provider. It is understood that a user/mobile station combination can access multiple data/services offered by different company or organization. In this case, the user/mobile station combination needs to be known from the different company or organization providing the data/services (i.e. at least the user mobile station number and user unique identifier needs to be stored in a
20 corporate directory of each company or organization).

Figure 3 illustrates a particular example of realization of the layout of a request message of the SMS type used by the method of the invention.

As described in ETSI standard TS 100 901 related to Technical realization of the Short
25 Message Service (SMS) (GSM 03.40 version 7.4.0 Release 1998), a SMS type message can contain a maximum of 140 octets of data.

The SMS request message comprises three fields F1, F2 and F3. In this example, the fields F1 and F3 correspond to the service request part SP of the message, while the field F2 corresponds to the authentication part AP of the message.

30 The field F1 can be a keyword for the service required on the remote private server PI, for example a ldap directory look-up service.

The field F2 can be a keyword or a unique mobile station user identifier for the authentication of the mobile station user, for example a unique personal identifying alias of the ldap directory of the corporation.

The field F3 can be a command, an action or a look-up request for data or services, for example contact details to be retrieved for a specified name in the ldap directory of the corporation.

As an alternative, the field F1 can be omitted if a unique telephone number is assigned to each type of private service. This has also the advantage of simplifying the generation of the request message on the mobile station.

A first application using the method of authentication of the invention is the authentication of a user to query remotely a corporate ldap directory, namely to look up contact details of an employee in the company database.

As an example, a request message composed by the user Bob Jones for having contact details of a colleague Alice Smith would be :

"LDAP BJones2 Alice Smith"

LDAP being the keyword for directory look-up service (field F1),

BJones2 being the alias or unique mobile station user identifier of Bob Jones in the corporate ldap directory (Field F2), and

Alice Smith* being the name of the person for which contact details are needed. The star * representing a wild card.

As an example, the response message will show the result of the corporate ldap directory look-up :

"Contact details for Alice Smith-Cooper:

Tel: +23-4472-6468

Mobile: +23-6721-3234

Email: asmithcooper@corporation.com"

From the mobile station user perspective, the security is improved because the user knows the specific layout required to compose the request message and also its own unique identifier (alias).

From the private data or service provider, the security is improved because only a request message in the required layout with a matching unique mobile station user identifier/ mobile station phone number combination can succeed the authentication checks.

Obviously, the request message is not limited to the particular layout described. The different fields F1, F2, F3, and the different parts AP, SP can be ordered and arranged differently. Nevertheless, it is necessary that both the user and the data/service provider use the same request message layout so that the service provider, in particular the processing server, is able to separate the authentication part from the service request part of the request message.

Also the content of the fields are not limited to what is described as an example. In particular, the user unique identifier is a data that identify the user uniquely. The user unique identifier can be the user alias, or any other uniquely identifying field allocated to this particular user in the ldap directory.

Advantageously, in order to further improve security, the request message and the response message can be ciphered by well known methods of the man skilled in the art which will not be describe (algorithms using symmetric or asymmetric keys).

A second application using the method of authentication of the invention is the authentication of a user to query technical or financial information on :

- settings and status of remote system and equipment, namely temperature sensor, pressure sensor, valve, flow-rate sensor of an oil rig...etc ;
- value of particular company share on the stock exchange market, PER, income, debt...of a company...etc.

A third application using the method of authentication of the invention is the authentication of a user to remotely control a system or an equipment. In this case, the field F3 is a command like open, close, stop, start, adjust, set ...etc, associated to an identification number of the system or equipment or part thereof to be controlled.

CLAIMS

1. Method for authenticating a user of a mobile station (MS) for accessing to private data/services (D, S), comprising the steps of :

- 5 - composing a request message on the mobile station, said message including a request for private data (SP), and sending said request message to a private server (MG, PS) offering the access to said private data/services (D, S), via the telephone network (N),
- 10 - checking the authenticity of the user based on the request message received by the server (MG, PS),
- if the user authenticity is confirmed, composing a response message including the requested private data/services (D, S) of the private server, and sending back to the user said response message, via the telephone network (N),
- 15 wherein the request message additionally includes a user unique identifier (AP), and is received by the private server with an appended user mobile station number, and wherein the authenticity checking performed by the private server comprises the steps of :
- checking whether the user unique identifier (AP) is stored in a private directory database (DB),
- 20 - checking whether the appended user mobile station number matches with the user mobile station number allocated to the user unique identifier stored in the private directory database (DB).

25 2. Method for authenticating a user of a mobile station for accessing to private data/services as recited in claim 1, wherein the user unique identifier is a data related to the user of the mobile station, said data being stored in the private directory database (DB).

30 3. Method for authenticating a user of a mobile station for accessing to private data/services as recited in claim 2, wherein said data related to the user of the mobile station is the lightweight directory access protocol alias of the user.

35 4. Method for authenticating a user of a mobile station for accessing to private data/services as recited in one of the preceding claims, wherein the request message is a text message of the SMS type.

5 Method for authenticating a user of a mobile station for accessing to private data/services as recited in one of the claims 1 to 3, wherein the request message is a MMS type message.

5 6. Method for authenticating a user of a mobile station for accessing to private data/services as recited in one of the preceding claims, wherein the response message is a text message of the SMS type.

10 7. Method for authenticating a user of a mobile station for accessing to private data/services as recited in one of the claims 1 to 5, wherein the response message is a MMS type message.

15 8. Method for authenticating a user of a mobile station for accessing to private data/services as recited in one of the preceding claims, wherein the request message and the response message are ciphered.

20 9. Method for authenticating a user of a mobile station for accessing to private data/services as recited in one of the preceding claims, wherein the requested data are stored in private directory database (DB).

10. Method for remotely looking up information stored in a private database by a user of a mobile station, wherein the user is authenticated by an authenticating method as recited in claims 1 to 9.

25 11. Method for remotely controlling a private equipment by a user of a mobile station, wherein the user is authenticated by an authenticating method as recited in claims 1 to 9.

30 12. Method for remotely accessing to private data/services by a user of a mobile station, wherein the user is authenticated by an authenticating method as recited in claims 1 to 9.

ABSTRACT

Authentication method for enabling a user of a mobile station to access to private data or services

5

A method for authenticating a user of a mobile station (MS) for accessing to private data/services (D, S) comprises the steps of composing a request message on the mobile station (MS), and sending it to a private server (MG, PS) offering the access to the private data/services (D, S) via the telephone network (N). The message includes a request for private data/services (D, S). The authenticity of the user is checked based on the request message received by the server (MG, PS). If the user authenticity is confirmed, a response message including the requested private data/services is composed and sent back to the user via the telephone network.

The request message additionally includes a user unique identifier, and is received by the private server (MG, PS) with an appended user mobile station number. The authenticity checking is performed by the private server by checking whether the user unique identifier is stored in the private directory database (DB) and by checking whether the user unique identifier matches with the user mobile station number allocated to the user unique identifier stored in the private directory database (DB).

20

Figure 1

THIS PAGE BLANK (USPTO)

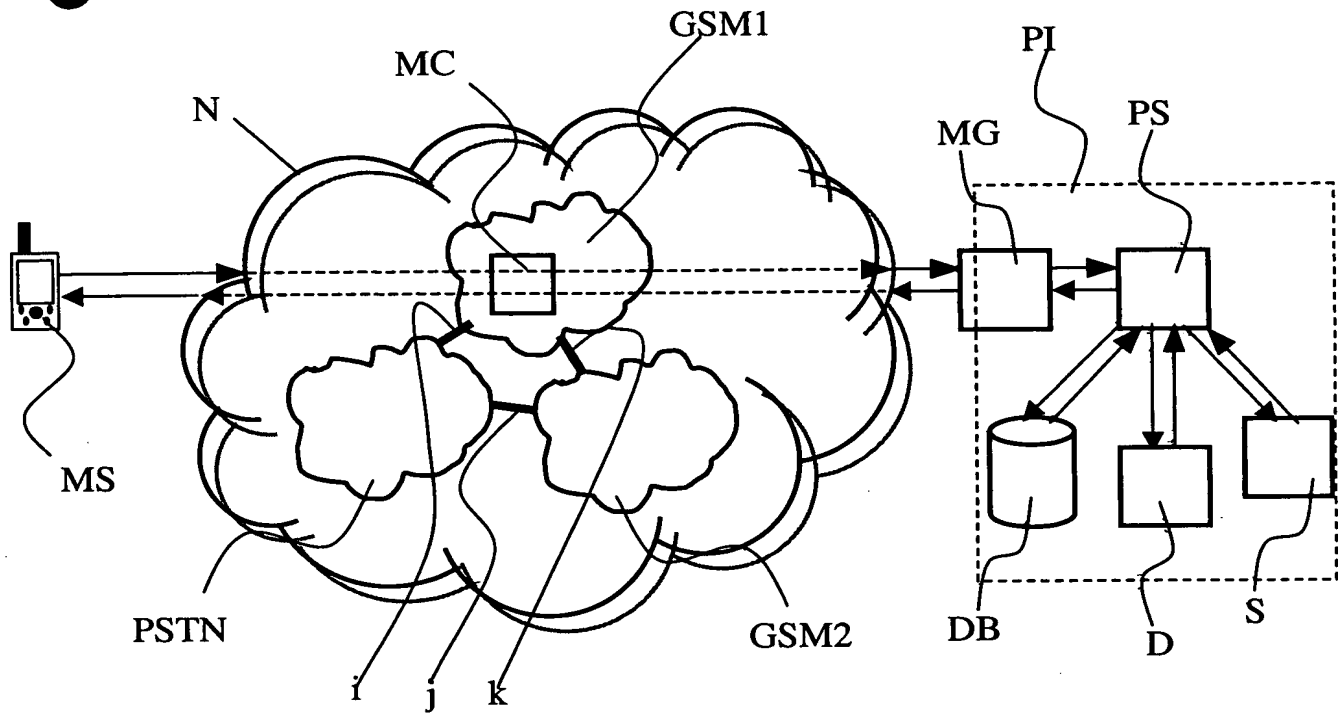


Figure 1

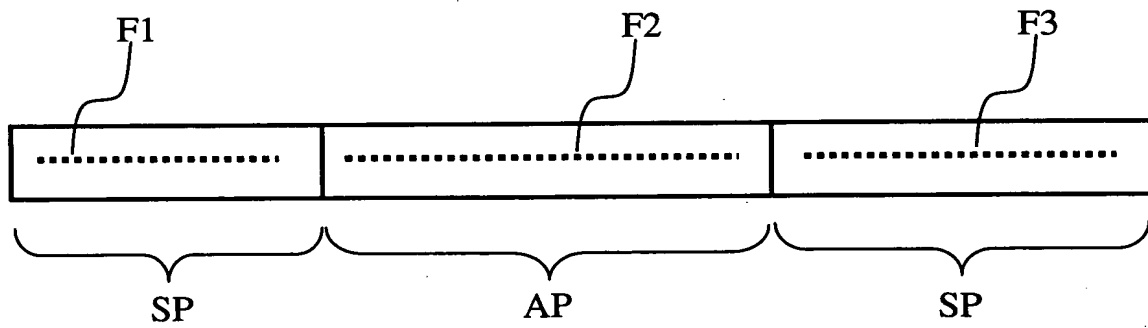
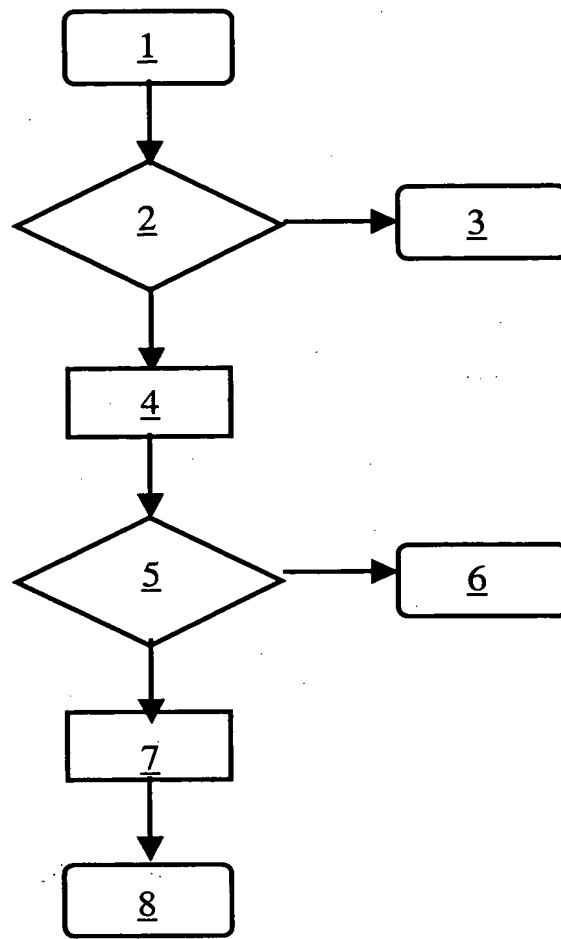


Figure 3

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)

**Figure 2**

THIS PAGE BLANK (USPTO)